

NHN-TTK10A/TTK20A/ NHN-TTK34A/TTK34AK/TTK40A/TTK40AK

Metal Dome Type Transition Terminal Block
弹片式转换端子台



产品特点 FEATURES

- NHN-TTK10A采用10P连接器一一对应10P端子台，不分输入/输出，可双向连接使用；转接板主要作转接使用，配合本公司C,M,K,T,P系列其它产品，完全实现高效率省配线的连接；
- NHN-TTK20A为20P连接器对应20P端子连接，可对应市面上所有带20P MIL插头的PLC连接；
- NHN-TTK34A为34P连接器对应34P端子连接，可对应市面上所有带34P MIL插头的PLC连接；
- NHN-TTK40A为40P连接器对应40P端子连接，可对应市面上所有带40P MIL插头的PLC连接；体积小、设计紧凑；
- 四款均为业界最小空间设计。
- NHN-TTK10A use 10P MIL connectors to corresponding to 10P terminal block, which can be used in two-way connecting regardless input and output; Interface panel is used to transfer and help to march NNC other products to realize high-effective wiring connection.
- NHN-TTK20A is a 20 pin terminal connection for 20 pin connector,suitable to all PLC connections with 20 pin MIL plug on the market.
- NHN-TTK34A is a 34 pin terminal connection for 34 pin connector,suitable to all PLC connections with 34 pin MIL plug on the market.
- NHN-TTK40A is a 40 pin terminal connection for 40 pin connector,suitable to all PLC connections with 40 pin MIL plug on the market, small size for space saving.
- These four products are a minimum space design of the Intra-industry.

剥线长度: 6mm 1.5mm² Following /AWG16



规格参数 SPECIFICATIONS

输入 INPUT		
• 额定电流 Nominal operating current	1A	
• 额定电压 Nominal coil voltage	DC 24V	
输出侧对应 Corresponding output Devices		
Button Switch, Photoelectric Switch, Solenoid, Indicator, Steepping, Servo Motor, etc	Servo motor control	signal line circuit

选型参考 TYPE SELECTION REFERENCE

型号 Model	NHN-TTK10A	NHN-TTK20A	NHN-TTK34A/34AK	NHN-TTK40A/40AK
名称 Name	10位端子台	20位端子台	34位端子台	40位端子台
关联产品 RELATED PRODUCTS				
适用电缆 Suitable cable	X200-1 X210-1 X216-1 X216-2	X200-2 X210-2 X218-1 X218-9	X200-3 X210-3	X210-4 X200-4 X210-5 X218-6

适用PLC SUITABLE PLC

KEYENCE	KV-B16XA/C KV-series of small PLC	KV-C32XA/C KV-C64XA/C KV-C32TA/C KV-C64TA/C	KV-NC32T KV-NC32EX KV-NC32ET KV-NC16EXT	KV-1000 KV-3000 KV-5000	KV-H20S KV-H40S
Panasonic	FPO-C16T/C16CT FPO-C16P/C16CP FPO-C32T/C32CT/T32CT FPO-C32P/C32CP/T32CP FPO-E16T/P FPO-E32T/P FPO-E8X FPO-E16X FpΣ-C28 FpΣ-C32	FPO-C16T/C16CT FPO-C16P/C16CP FPO-C32T/C32CT/T32CT FPO-C32P/C32CP/T32CP FPO-E16T/P FPO-E32T/P FPO-E8YT FPO-E16YT FΣ-C28 FpΣ-C32		FP2-XV64D2T/P FP2-C1D FP2-X32D2 FP2-X64D2 FP2-32T/P FP2-Y64T/P FP2-XV64D2T/P FP2-XV64D7T/	FP2-XV64D7P FP2-PP21 FP2-PP22 FP2-PP41 FP2-PP42 FP2-HSCT FP2-PXYT
OMRON		CJ1W-MD232 CJ1W-MD233		CJ1W-ID231 CJ1W-ID261 CJ1W-ID232 CJ1W-ID262 CJ1W-ID263 CJ1W-MD262 CJ1W-MD263 CJ1W-MD563 CJ1W-QD231 CJ1W-QD261 CJ1W-MD261	CJ1W-OD232 CJ1W-OD233 CJ1W-OD262 CJ1W-OD263 CJ1W-MD563 CJ1W-CPU21 CJ1W-CPU22 CJ1W-CPU23
MTSUBISHI		FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C	FX2NC-16EXL-C FX2NC-16EYT FX2NC-16EYT-C FX2NC-10PG FX2NC-10GM FX2NC-20GM	QX41 QX41-S1 QX42 QX42-S1 QX71 QD70P4 QD70P	QX72 QY41P QY42P QY71 QH42P GD70D GD75M
SIEMENS				40P plug with a full range	
Yokogawa				F3WD64-3N F3WD32-3F F3WD64-3F	

NHN-TTK10A/TTK20A NHN-TTK34A/TTK34AK/TTK40A/TTK40AK


Metal Dome Type Transition Terminal Block
弹片式转换端子台

配线图及外形图 WIRING DIAGRAM AND DIMENSIONS


NHN-TTK10A

(mm)

外形尺寸图 Dimensions

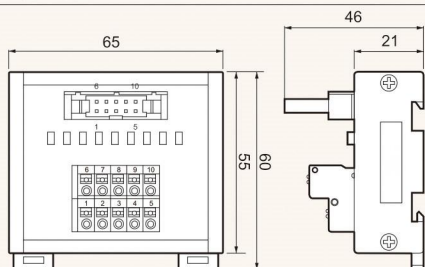


配线图 Wiring Diagram

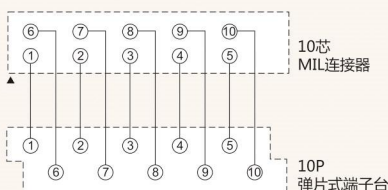


NHN-TTK20A

外形尺寸图 Dimensions

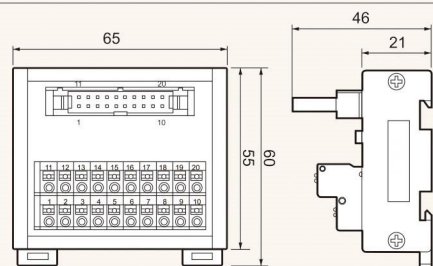


配线图 Wiring Diagram

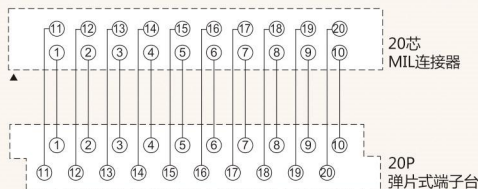


NHN-TTK34A/TTK34AK

外形尺寸图 Dimensions

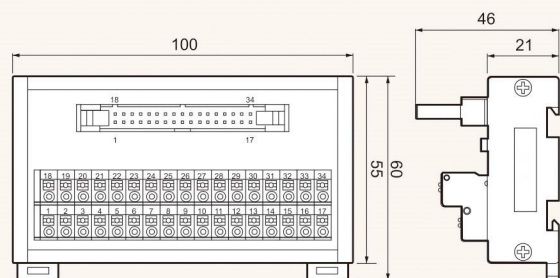


配线图 Wiring Diagram

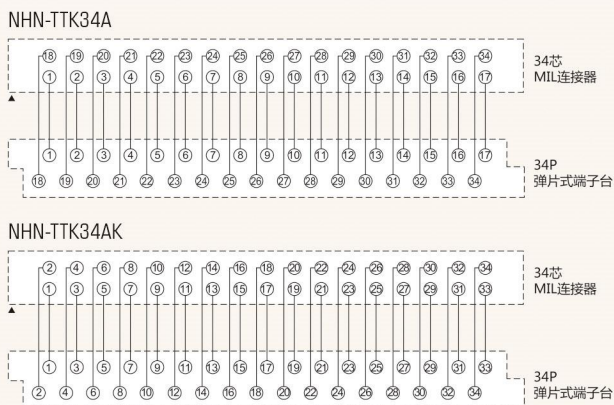

NHN-TTK40A/TTK40AK

外形尺寸图 Dimensions

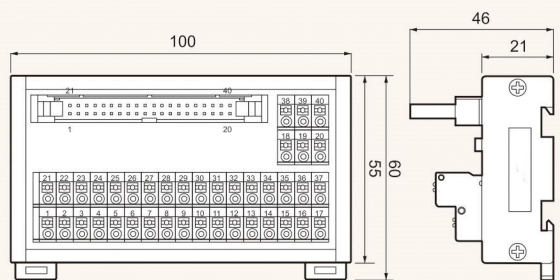

配线图 Wiring Diagram

